

**Series 2, free-standing fridge-freezer  
with freezer at bottom, 186 x 60 cm,  
White  
KGN34NWEAG**



- **Multi Box:** ideal storage for fruits and vegetables.
- **No Frost:** never defrost again, thanks to perfect protection from ice formation - that saves time and effort.
- **Perfect Fit:** place your fridge right next to walls or other appliances to save space.
- **Multi Airflow System:** even air distribution for longer freshness.
- **LED lighting:** all your items in perfect view.

#### Technical Data

Energy Efficiency Class<sup>1</sup>: ..... E  
 Average annual energy consumption in kilowatt hour per year  
 (kWh/a): ..... 244 kWh/annum  
 Sum of volume of frozen compartments: ..... 107 l  
 Sum of volume of chill compartments: ..... 193 l  
 Airborne acoustical noise emissions : ..... 42 dB(A) re 1pW  
 Airborne acoustical noise emission class: ..... D  
 Built-in / Free-standing: ..... Free-standing  
 Door panel options: ..... Not possible  
 Height: ..... 1860 mm  
 Width of the appliance: ..... 600 mm  
 Depth: ..... 660 mm  
 Net weight: ..... 62.7 kg  
 EAN code: ..... 4242005196722  
 Connection rating: ..... 100 W  
 Fuse protection: ..... 10 A  
 Door hinge: ..... Right reversible  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50 Hz  
 Length electrical supply cord: ..... 240.0 cm  
 Number of compressors: ..... 1  
 Number of independent cooling systems: ..... 1  
 Interior ventilator: ..... No  
 Reversible Door Hinge: ..... Yes  
 Number of Adjustable Shelves in fridge compartment: ..... 2  
 Shelves for Bottles: ..... No  
 Frost free system: ..... Fridge  
 Installation typology: ..... Free-standing



4 242005 196722

<sup>1</sup> Scale of Energy Efficiency Classes from A to G

## **Series 2, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, White KGN34NWEAG**

- Noise Level : 42 dB
- Temperature rise time : EU19\_Temperature rise time\_D: 12 H

- 
- KGN34NWEAG
  - No Frost, Fridge freezer
  - Cambered Door, High-door design White

### **Design features**

- White doors and white side panels
- Integrated horizontal handle Integrated horizontal handle
- Right hinged door, reversible door
- LED electronic control

### **Food freshness system**

- 1 compressor

### **Key features - Fridge section**

- 1 MultiBox - Transparent drawer with a rippled bottom, ideal for storing fruits and vegetables.
- MultiAirflow system - improves circulation of air around the fridge
- Bright interior LED fridge light
- 4 safety glass shelves (2 height adjustable)
- Door shelves in fridge door: 1 large and 2 small

### **Key features - Freezer section**

- No Frost, never have to defrost ever again
- 3 freezer drawers
- SuperFreezing function with automatic deactivation
- Calendar frozen food
- Freezer malfunction warning signal: optical and acoustical warning system

### **Additional features**

- Optical and acoustic door open alarm
- 3 x egg tray, 1 x ice cube tray

### **Dimension and installation**

- Connection value 100 W
- 220 - 240 V
- Height adjustable front feet
- Dimensions: 186 cm H x 60 cm W x 66 cm D
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.



### **Functions**

### **Performance and Consumption**

- EU19\_EEK\_D: E
- Total Volume : 300 l
- Net Fridge Volume : 193 l
- Net Freezer Volume : 107 l
- Freezing capacity 24h : 12 kg
- Annual Energy Consumption: 244 kWh/a
- Climate Class: SN-T
- EU19\_Fast freezer facility\_D: yes

**Series 2, free-standing fridge-freezer  
with freezer at bottom, 186 x 60 cm,  
White  
KGN34NWEAG**

Appliance name	a	b	c	d	e	f	g
KGN33 (Inner handle)	1760	600	660	590	600	1210	12

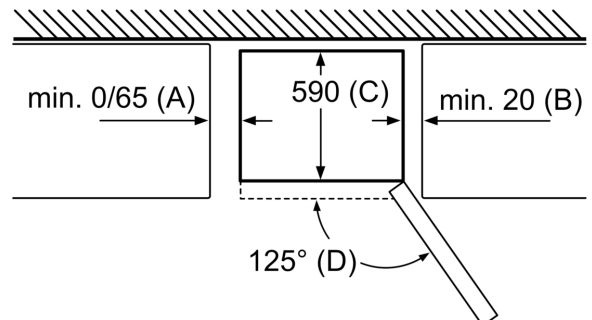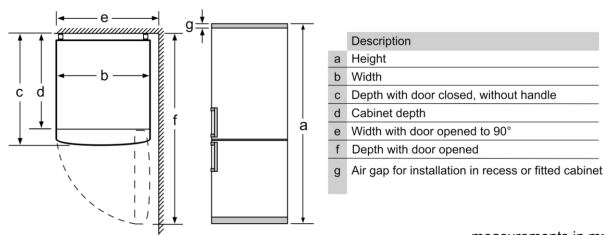

Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

**Dimension A:**  
In models with vertical integrated handles,  
in order to open easily, a minimum distance  
of 65 mm is needed.

measurements in mm