

Series 4, fully-integrated dishwasher, 60 cm, Variable hinge for special installation situations SMH4HTX02G













SGZ0BI02 decorative strips stainless steel 81,5cm
SGZ1010 inlet and outlet hose extention
SGZ8BI00 Connection rail for divided furniture
SMZ2014 Rack insert for stemware dishwasher
SMZ5000 Dishwashing aid set
SMZ5002 Silver polishing cassette
SMZ5300 GlassSecure Tray

Vario Hinge connected dishwasher with noise reduction at any time via the Home Connect App perfect even for kitchens with low plinth heights and high built in situations.

- A perfect design match thanks to Vario Hinge. Leaving no gaps even in kitchens with low plinth heights and high built-in solutions.
- Extra Dry: extra drying option for difficult-to-dry loads.
- InfoLight: a red light on the floor indicates whether the dishwasher is switched on or off.
- Height Adjustable Top Basket: offers extra space, especially for tall dishes.
- Home Connect: home appliances with smart connectivity for an easier everyday life.

Energy Efficiency Class:
Energy Consumption for 100 cycles Eco Programme: 84 kWh
Maximum number of place settings:
The water consumption of the eco programme in liters per cycle: 9.0
l
Programme duration:
Airborne acoustical noise emissions :46 dB(A) re 1pW
Airborne acoustical noise emission class:
Built-in / Free-standing:
Height of removable worktop: 0 mm
Dimensions of the product (HxWxD):815 x 598 x 550 mm
Required niche size for installation (HxWxD):815-875 x 600 x 550
mm
Depth with open door 90 degree: 1150 mm
Adjustable feet:
Maximum adjustability feet:
Adjustable plinth: Both horizontal and vertical
Net weight:
Gross weight:
Connection rating:
Fuse protection:10 A
Voltage:
Frequency: 50; 60 Hz
Length electrical supply cord:
Plug type:GB plug
Length inlet hose:
Length outlet hose:
EAN code:
Installation typology: Integrated





Series 4, fully-integrated dishwasher, 60 cm, Variable hinge for special installation situations SMH4HTX02G

Vario Hinge connected dishwasher with noise reduction at any time via the Home Connect App perfect even for kitchens with low plinth heights and high built in situations.

Performance

- Energy Efficiency Class¹: D
- Energy² / Water³: 84 kWh / 9 litres
- Capacity: 13 place settings
- Programme duration⁴: 4:30 (h:min)
- Noise level: 46 dB(A) re 1 pW
- Noise Efficiency Class: C

Programmes / functions

- 6 programmes: Eco 50 °C, Auto 45-65 °C , Intensive 70 °C, Express 65°, Glass 40 °C, Favourite
- Default favourite programme: Pre-Rinse
- 4 special options: Remote Start, Extra Dry, Half Load, SpeedPerfect+
- Add-On functions via Home Connect app: Hygiene+, Silence on Demand
- Machine Care

Flexible design elements

- Vario baskets
- Height adjustable top basket
- Low friction wheels on lower basket
- Rack Stopper to prevent derailing of bottom basket
- 2 foldable plate racks in bottom basket
- Knife rack in top basket
- Cutlery basket in lower rack
- Upper rack cup shelf

Innovations and technology

- Home Connect ready on WLAN
- Heat exchanger Hygienic and efficient drying
- DosageAssist detergent dispenser
- EcoSilence BLDC drive
- Automatic detergent detection
- AquaSensor III
- AquaMix Glass protection system

Design features


- VarioHinge 50mm
- Push button top edge controls
- InfoLight (Red) Light projection on the floor
- Time delay (3, 6 or 24 hours)
- Acoustic end of cycle indicator
- AquaStop: Bosch's warranty in case of water damage for the lifetime of the appliance. Please find warranty terms under https:// www.bosch-home.co.uk/customer-service/care-protection-and-part


s/additional-warranties

- Self-cleaning filter system with 3 piece corrugated filter
- incl. Steam protection for worktop
- Stainless steel/Polinox interior
- Dimensions (HxWxD): 81.5 x 59.8 x 55cm
- ¹ Scale of Energy Efficiency Classes from A to G
- 2 Energy consumption in kWh per 100 cycles (in programme Eco 50 $^{\circ}\text{C}$)
- ³ Water consumption in litres per cycle (in programme Eco 50 °C)
- ⁴ Duration of programme Eco 50 °C



Series 4, fully-integrated dishwasher, 60 cm, Variable hinge for special installation situations SMH4HTX02G

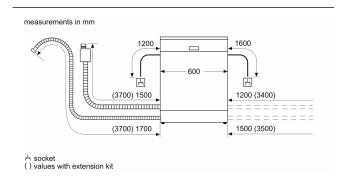



measurements in mm