

## Warranty Information

Proof of purchase will be required.

The guarantee does not cover faults or damage caused by incorrect installation and/or maintenance, ordinary wear and tear, water composition, etc.

\*Please see [www.deva.org.uk](http://www.deva.org.uk) for full terms and conditions of warranty

## Cleaning

Your product has a high-quality finish and should be treated with care to preserve the visible surfaces. Never use abrasives or abrasive cleaning agents to clean this product clean regularly with contamination free warm water and a damp soft cloth. Do not use products containing chlorine bleach or hydrochloric acid as these can damage the product.

We have a policy of continuous improvement and reserve the right to change specifications without notice.

METHVEN UK LIMITED

METHVEN EXPERIENCE CENTRE

3/3A STONE CROSS COURT

YEW TREE WAY

GOLBORNE

WARRINGTON

WA3 3JD

UNITED KINGDOM

INST-SPA2106-V1

TEL: 0800 195 1602

FAX: 0844 406 8690

EMAIL: [sales@uk.methven.com](mailto:sales@uk.methven.com)

[www.methven.com](http://www.methven.com)

# SPARKLE MK2

## BATH SHOWER MIXER

### SPA2106

#### Installation Guide

#### Technical Specification

#### Operating Pressure

Min: 0.5 Bar

Max: 5.0 Bar

#### Operating Temperature

Hot: 65°C

Cold: 5°C

#### Inlet Connections

3/4" BSP



Please read all of the instructions before installation.

## General

Methven recommends this product is installed by a competent person in compliance with all relevant regional regulations.

It is recommended that inlet pressures are as balanced as possible to provide optimum performance from your product.


Before commencing installation, ensure the system has been flushed to remove any debris which can damage the product.

Always turn off or isolate the water supply before commencing installation.

After installation all connections must be checked for leaks.

All outlets used primarily for personal hygiene shall deliver water at a safe temperature as per regional regulations.

It is the responsibility of the installer to ensure a waterproof seal is achieved.

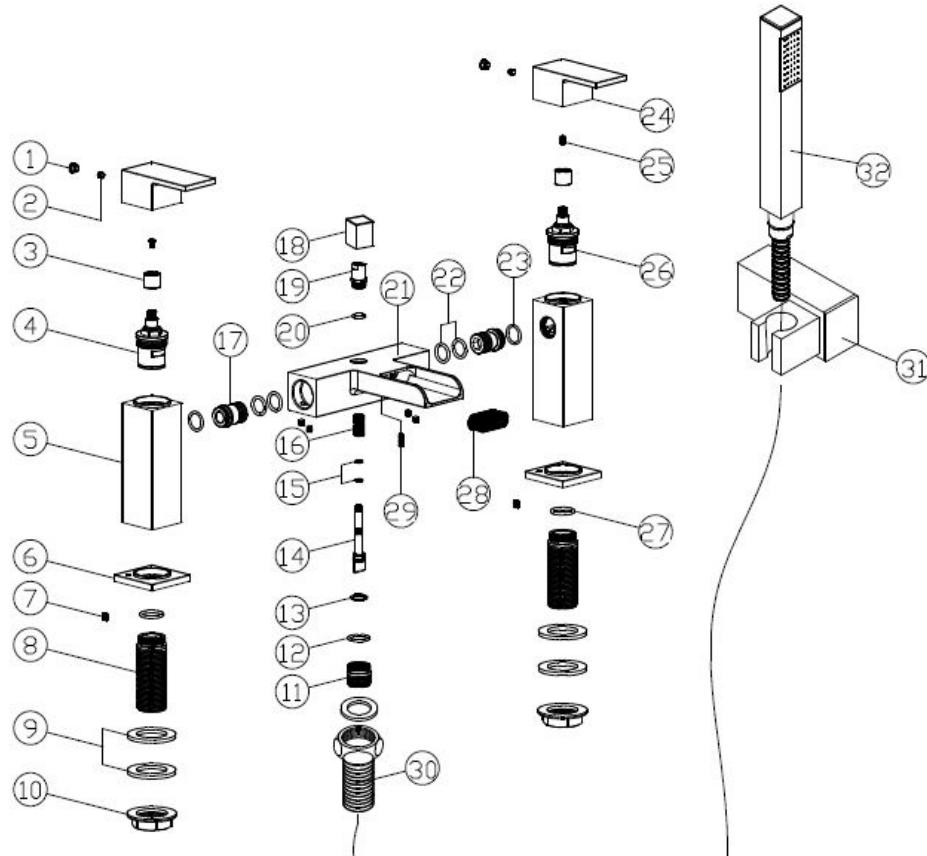

## Installation Instructions

- 1) Remove the back nuts (10) and back nut washer (9) from the threaded tails.
- 2) Push the mixer tails (8) through the holes in the bath, ensuring that the base rings (6) and base ring washers (7) are correctly positioned, fully covering the mounting holes.
- 3) Place the back nut washer (9) and back nuts (10) back onto the tails, under the bath and screw up until the tap is secured in position (do not over-tighten). Please note additional sealant can be used if required.
- 4) Connect the water supply pipes to the tails and tighten, an adequate sealing method should be used to create a watertight seal.
- 5) Identify a suitable location for the wall bracket (31), so that the hose will not be under tension when fitted. Attach to the wall using either the plugs and screws supplied or other suitable fittings for the specific installation.
- 6) Fit a hose washer into each end of the hose, connect the handset to the cone shaped end and the other end to the hose outlet on the mixer.
- 7) Reinstate the water supply and test for leaks.

